

DIGITAL DISPLAY

for industrial applications



Content:

Technical Data2
Technical Drawing3
Models And Accessories3

Series WAY-SX


Key-Features:

- Multifunctional display with touchscreen
- Display range: 8 digits plus sign
- Inputs: SSI, Control
- Input frequencies: up to 1 MHz
- Sensor supply: 24 VDC
- Possible options (combinable):
 - Option AC: power supply 115...230 VAC
 - Option AO: analog output, 4 control outputs and RS232 interface
 - Option AR: analog output, 4 control outputs and RS485 interface
 - Option CO: 4 control outputs and RS232 interface
 - Option CR: 4 control outputs and RS485 interface
 - Option RL: 2 relay outputs

TECHNICAL DATA

Display	Type: Graphic LCD with backlight and touchscreen Display range: 8 digits plus sign (-99999999...99999999) Digit height: 13 mm Colour: red / green / yellow (selectable)
Connections	screw terminal, 1.5 mm ² / AWG 16
Power supply DC	Input voltage: 18...30 VDC Consumption: approx. 100 mA (unloaded) Fuse protection: T 0.5 A (extern) Protection circuit: reverse polarity protection
Power supply AC (Option AC)	Input voltage: 115...230 VAC (50 ... 60 Hz) Power consumption: approx. 3 VA (unloaded) Fuse protection: extern: T 0.1 A
Encoder supply (DC Version)	24 VDC (approx. 1 V lower than the power supply voltage), max. 250 mA
Encoder supply (AC Version)	24 VDC (± 15%), (max 150 mA until 45 °C / 80 mA by more than 45 °C)
SSI-Interface	Number of inputs (channels): 1 (Clock, /Clock, Data, /Data) Configuration: Master or Slave Format: Binary or Gray code Frequency: max. 1 MHz Load: max. 2 mA / Ri > 10 kΩ / 47 pF
Control inputs	Number of inputs: 3 Format: HTL, PNP (Low 0...3 V, High 9...30 V) Frequency: max. 10 kHz Load: max. 2 mA / Ri > 15 kΩ / 470 pF
Analog output (Option AO / AR)	Voltage output: -10...+10 V (max. 2 mA) Current output: 0/4...20 mA (burden: max. 270 Ω) Resolution: 16 Bit Accuracy: ± 0,1 % Reaction time: < 150 ms
Control outputs (Option AO / AR / CO / CR)	Number of outputs: 4 Format / level: 5...30 V (depend on the COM+ voltage), PNP Output current: max. 200 mA Reaction time: < 1 ms
Relay outputs (Option RL)	Number of outputs: 2 Configuration: potential free changeovers AC-Switching capacity: max. 250 VAC / 3 A / 750 VA DC-Switching capacity: max. 150 VDC / 2 A / 50 W Reaction time: < 20 ms
Serial interface (Option AO / AR / CO / CR)	Format: RS232 (AO / CO), RS485 (AR / CR) Baud rate: 9600, 19200 or 38400 baud
Working temperature	-20...+60 °C
Storage temperature	-25...+70 °C
Housing	Material: ABS, UL 94 V-0 Dimensions: 96 x 48 x 116 mm
Panel cut out	91 x 43 mm
Protection class	IP65 (front), IP20 (rear)
Weight	ca. 200 g
Conformity and standards	EMC 2004/108/EC: EN 61000-6-2, EN 61000-6-3, EN 61000-6-4 LV 2006/95/EC: EN 61010-1 RoHS 2011/65/EU: EN 50581

TECHNICAL DRAWING

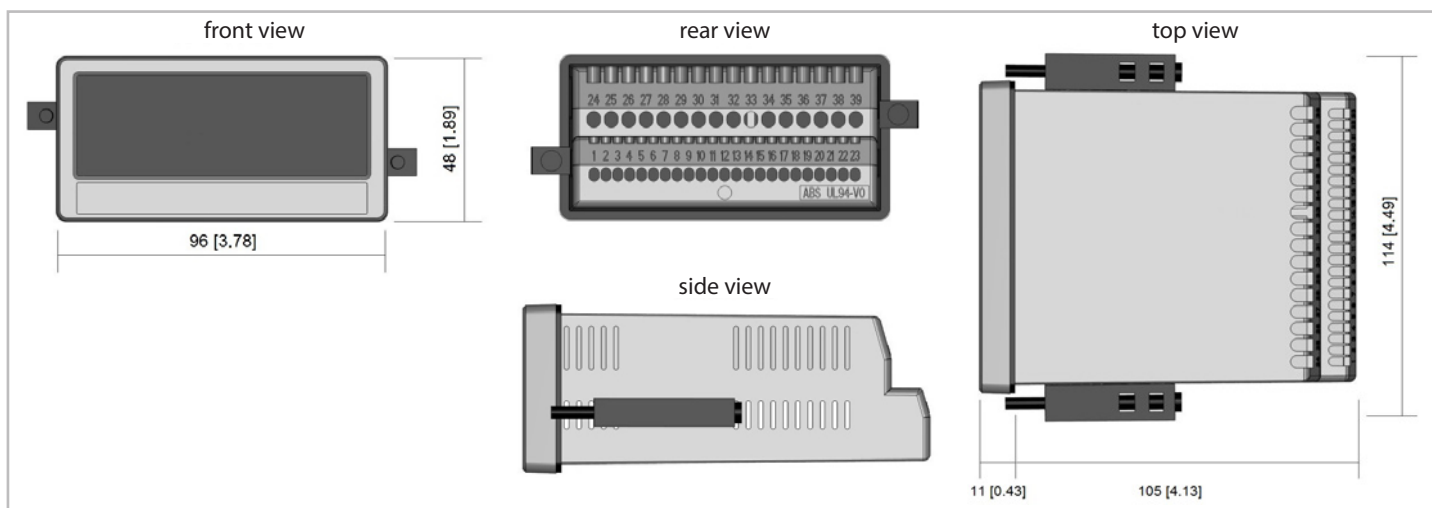

MODELS

WAY-SX-S Standard Display

Options	Description	Combinable with
AC	power supply 115...230 VAC	AO, AR, CO, CR, RL
AO	analog output, 4 control outputs, RS232 interface	AC, RL
AR	analog output, 4 control outputs, RS485 interface	AC, RL
CO	4 control outputs, RS232 interface	AC, RL
CR	4 control outputs, RS485 interface	AC, RL
RL	2 relay outputs	AC, AO, AR, CO, CR

ACCESSORIES

TG9648	table housing	Configuration	Pre-adjustment according to customer specifications
GEH0IP65	Aluminium housing, IP65		

Subject to change without prior notice.

WayCon Positionsmesstechnik GmbH
 email: info@waycon.de
 internet: www.waycon.biz

WayCon
 Positionsmesstechnik

Head Office
 Mehlerstr. 4
 82024 Taufkirchen
 Tel. +49 (0)89 67 97 13-0
 Fax +49 (0)89 67 97 13-250

Office Köln
 Auf der Pehle 1
 50321 Brühl
 Tel. +49 (0)2232 56 79 44
 Fax +49 (0)2232 56 79 45